



The magic life in the image world


E-IMAGE

ES90 slider

E-IMAGE slider adopts durable and lightweight carbon fiber rails, and it comes with a weighted flywheel attaches to the end of the slider, providing a handle for smooth and precise hand-cranked slides, even at slow speeds. The carriage features a 3/8" screw for compatibility with most tripod heads.



Sliding length: 70cm/27.6in

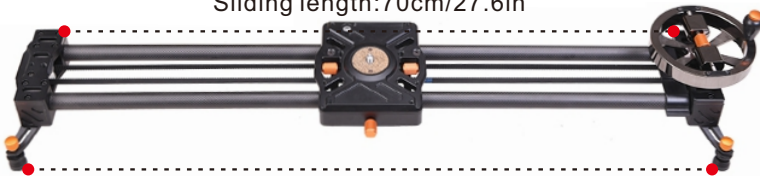

Length end to end: 90cm/35.4in

SPECIFICATIONS

| | | |
|--|--------------|----------------|
| | Diameter | 2.2cm / 0.87in |
| | Material | Carbon fiber |
| | Payload | 8kg / 17.6lbs |
| | Length | 90cm / 35.4in |
| | Net Weight | 4kg / 8.8lbs |
| | Travel Range | 70cm / 27.6in |




FEATURES



All tubes adopt pure 16x carbon fiber material. Lightweight, big payload, extremely sturdy and durable.



Fly wheel adds a damping effect that ensure smooth acceleration/ deceleration.

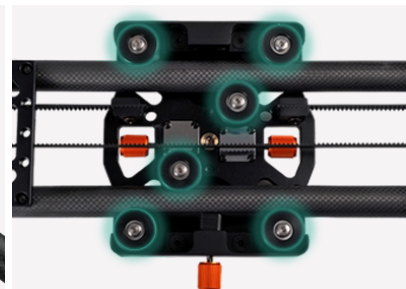

High quality silent bearing imported from Japan and synchronous belts, make the movement in perfect smooth and in silence.



Height adjustable feet that spread out in triangular form, add extra stability to the slider.



Optional Motor 1 are available that make it motorized, can make time-lapse, stop-motion, trace record.



Standard 3/8" screw

Suitable for different sizes of cameras.

