



The magic life in the image world

E-IMAGE

E-1060

Professional Panel LED Light
2700K- 6500K



Specifications

Model
E-1060

Power Supply
AC100-240V, DC12-24V

Max.Power
65W

Control Mode
International standard DMX512 signal

LED QTY
918 pcs

Special effects
11 species

Beam Angle
120°

Material
Aluminium

Color Temperature
2700K-6500K

Size
360x413mm

CRI
≥97

Net Weight
4.2kg

TLCI
≥97

		Illuminance				
		2700K	3200K	4400K	5600K	6500K
Distance	Color temperature					
	Illuminance					
		1M	1753LuX	1904LuX	1987LuX	2063LuX
	2M	481LuX	517LuX	543LuX	562LuX	543LuX
	3M	235LuX	259LuX	273LuX	282LuX	271LuX

11 special effects one button access to special effects



Lighting



SOS



Tracing



Firework



Cop car



Screen



Fault bulb



Flash



Turn signal



Breath




H&L beam





• **Max.Power** 65W
 • **Illuminance** 2284Lux @1m
 • **LED QTY** 918 pcs

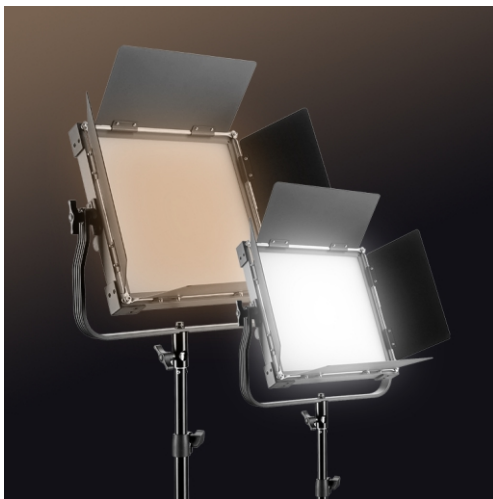

Bi-color temperature 2700K-6500K.



Use external V-lock battery Use AC power adapter

Dual power supply, make indoor and outdoor shooting possible.



With 4-leaf barn door, built-in light diffuser design.



• **TLCI** ≥97
 • **CRI** ≥97

High color rendering index restore true colors.



• **Size** 360x413mm
 • **Net Weight** 4.2kg

What's included:



E-1060 LED Light



Power plug cable



Adapter



Safety cable