



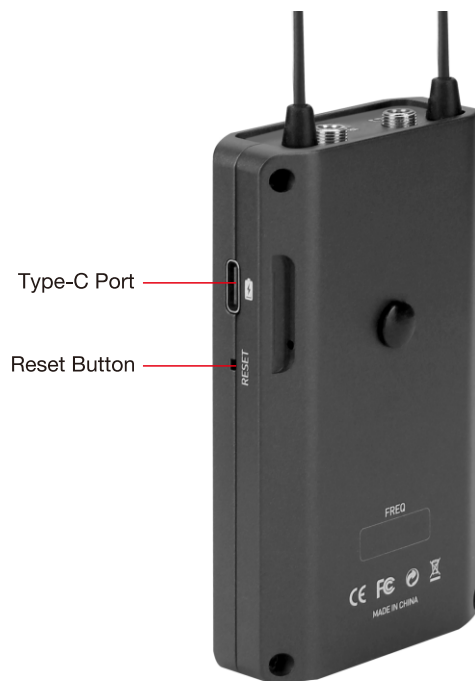

The magic life in the image world

E-IMAGE

DR200 Dual-Channel Portable Receiver

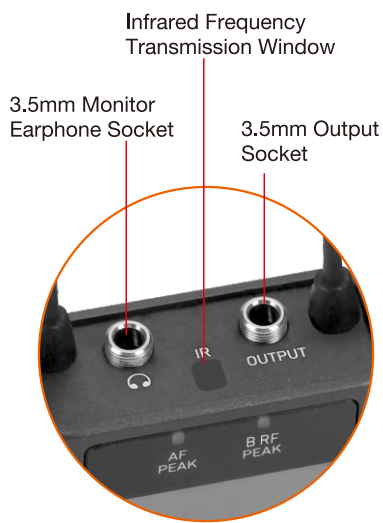



Power Supply System



USB charging port



Specifications

Channel	A/ B 100CHs
Wireless Frequency Range	UHF500~900MHz
Frequency Response	60Hz~15KHz
Transmitting Power	10mW(Low) / 30mW(High)
Stray Radiation	< -60dB
Audio T.H.D	< 0.5%@1KHz
High pass filter	-75Hz(Low) / -150Hz(High)
Audio Output	Mono / Stereo
Display Screen	LCD
Working Distance	In line-of-sight area(120m) / In barrier area(60m)
Power	Type-C 3.5 hours full,DC 5V@1000mA
Battery	Built-in li-ion battery,3.7V,1800mA/Hour
Working Time	10Hours
Size	96x60x19mm
Operating Temperature	0-50℃
Material	Aluminum

Accessories



XLR to 3.5mm Cable



USB to Type-c Cable



TRRS Cable (For Phone) x1
TRS Cable (For Camera) x1



Cold Shoe Adapter



Belt Clip