


E-2616

E-IMAGE LED studio profile spot light is a new product with significant improvement and performance, and the quality of application and technology. Silent operation, small volume, aluminum housing, long life, super performance, well suited for stage, studio, broadcasting, museums, and more.









Power Supply	AC 100V-240V, 50/60Hz
Power Consumption	50W
Color Temperature	3000k /5700k
Luminous Flux	3440lm-4158lm
CRI	≥93Ra
LED Life	>50000H
Dimmer	0-100% dimmer intensity
Different lens available	19° / 26° / 36° / 50°
Strobe	1-20 flash per second
Cooling System	High quality radiator
Display	LCD screen display
DMX Connection	XLR 3Pin or XLR 5Pin
Control Mode	The device can be connected to the signal receiver, to achieve DMX512 signal control
Protection Grade	IP 20
Use Environment Temperature	-20°C-45°C
Net Weight	1.8kg/ 4.0lbs
Gross Weight	2.5kg/ 5.5lbs
Box Dimensions (LxWxH)	380x195x195mm/ 15.0x7.7x7.7in

Optional: Signal receiver

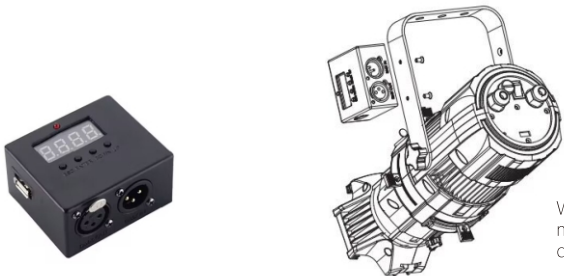

When first use, please fasten the signal receiver on the mounting bracket as below drawings, then connect the device through usb cable and signal cable.

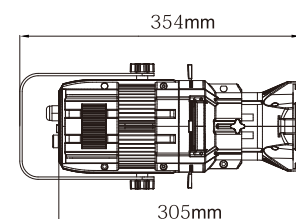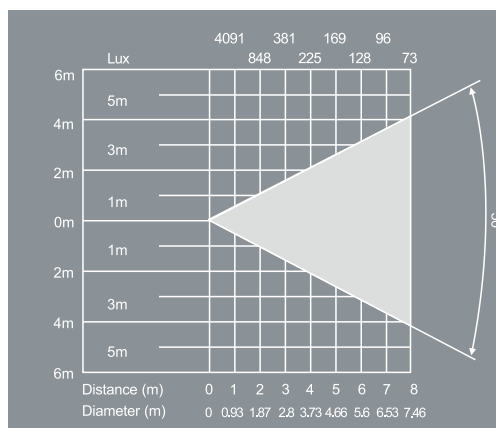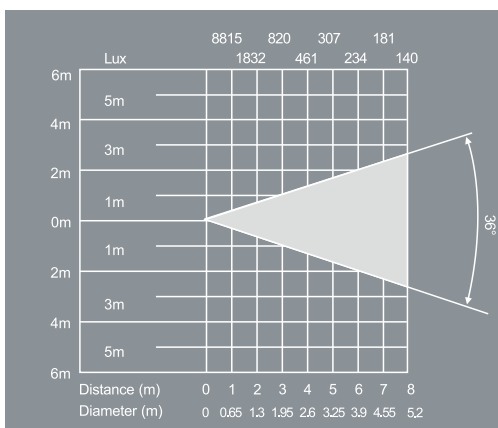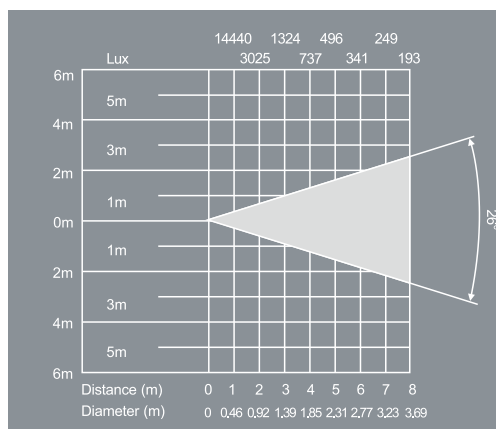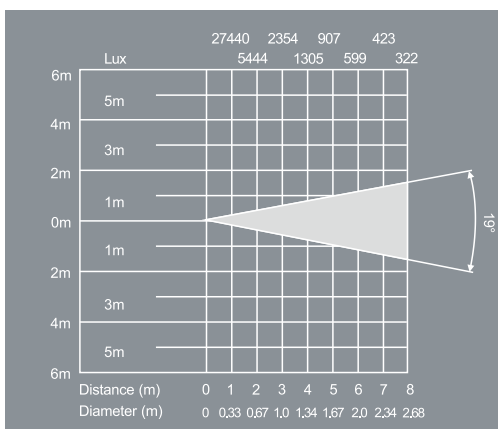

| **E-2616** |



- 1.Yoke
- 2.Locking Knob
- 3.LED Beads



- 4.DMX512 Input
- 5.Power Input
- 6.Fuse
- 7.Power Output
- 8.ON / OFF

What's included:



Fresnel LED Light




User Guide



AC Power Cable



3-Pin Male To Female
XLR DMX Cable



Color Frame



Gobo Holder