



The magic life in the image world

E-IMAGE

M3040 Professional Recording Microphone


- A small condenser microphone with fully integrated preamplifier
- Detachable cable and high sensitivity, suitable for long distance pickup.
- Applications include ceiling installation or desktop installation of conference, hanging radio for chorus, live recording, picking up audience or room environment sound.
- It can be uniquely used in all kinds of field, studio and radio and television applications.




13.0mm/0.5in



20mm/0.8in

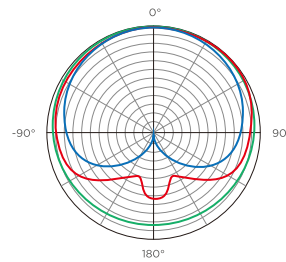

FREQUENCY RESPONSE

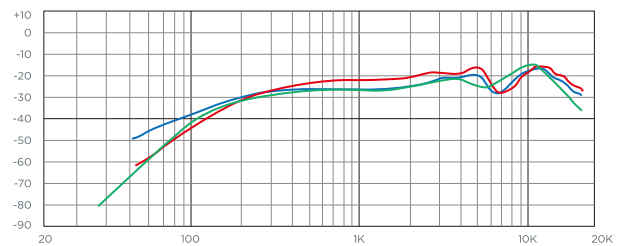

WHAT'S INCLUDED




① XLR Cable	1pc
② M3040 Microphone	1pc
③ Microphone Clip	1pc



SPECIFICATIONS


Element	Back Electret Condenser
Polar Pattern	Cardioid / Hyper-cardioid / Omni
Frequency Response	40Hz-16KHz
Sensitivity (48V/1.5V)	-38dB±3dB(1dB=1V/Pa at 1KHz)
Output Impedance	600Ω±20% (at 1KHz)
Max.Input SPL	130dB/115dB (T.H.D≤1% at 1KHz)
Signal to Noise Ratio	70dB (1KHz at 1Pa)
Power Requirements	48V DC 2mA
Net Weight	27g
Size	∅13 x 60mm
Output Interface	XLRM

FEATURES




Cardioid


The E-IMAGE M3040 is suitable for long distance pickup, hanging radio for chorus, live recording, picking up audience or room environment sound.




Interchangeable with hyper-cardioid and omni sound heads.




Cardioid




Hyper-cardioid
(Optional)




Omni
(Optional)



Straight intermediate and advanced high frequency make the sound clear.

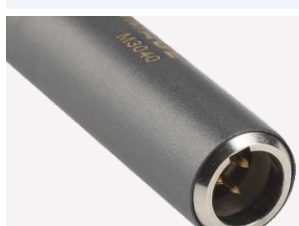


Operates on 48V phantom power.



With broad balanced range of frequency response.

40Hz-16kHz
Frequency response



Standard 75cm detachable cable.