


V60 Stereo Condenser Microphone

The E-IMAGE V60 is a stereo shotgun microphone. Create higher-quality audio than your camera can alone with this stereo mic. The E-IMAGE V60 Stereo Microphone connects to the camera via the 3.5mm stereo mini-plug and is designed specifically for recording audio while making DSLR videos.



COMPONENT

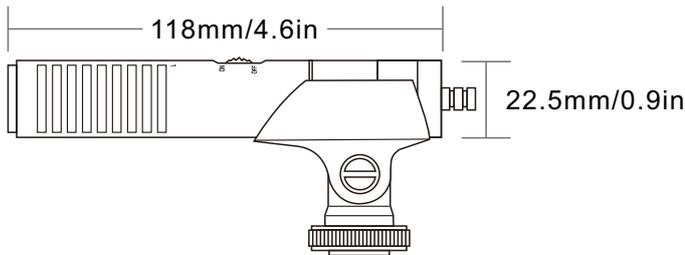

Safety box	1pc
Microphone holder	1pc
Long hair windshield	1pc
Foam windscreen	1pc
Rubber tube adapter	1pc
V60 microphone	1pc



SPECIFICATIONS

Element	Back Electret Condenser
Polar Pattern	Stereo
Frequency Response	50Hz-20kHz
Bass	18Hz,12dB/octave
Sensitivity	-46dB±2dB(1dB=1V/Pa at 1kHz)
Output Impedance	500Ω
Max.Input SPL	130dB SPL
Signal to Noise Ratio	70dB(1kHz at 1Pa)
Power Requirements	48V DC/1.5V AA/UM3,2mA
Weight	75g
Dynamic Range	106dB(1kHz at Max SPL)
Body Dimensions	φ 22.5×118mm
Output Interface	3.5 Audio Interface

FEATURES



Compact and light weight stereo microphone.



The Equipped On/Off switch helps conveniently control.



Power supply directly from the device.



3.5 Audio Interface

Configuration 3.5 video pluggable audio output line, used to connect the camera and microphone, better capture when shooting, easy to carry.



Foam windscreen with high purity anti-spray sound, soft touch. Easy to clean and not deformed and other functions.



Rugged housing made of Brass.